



TCF 1400

**140 U.S. ton | 127 metric ton
Telescopic Crawler Crane**

- 42.3' - 195.4' | 12.9 - 59.5 m main boom
- 203' | 61.96m main boom tip height
- Six section pin & latch boom
- Remarkable control, reliability & capacity performance
- Unbeatable hydraulic pilot-operated control
- Superior jobsite flexibility
- 20° tilting cab
- Quick mobilization - transports in four or five loads
- Rear view and winch cameras

TEC 1400

140 U.S. ton | 127 metric ton Telescopic Crawler Crane

**Built for remarkable control,
reliability and capacity
performance on any terrain**

- 320 hp (239 kW) Cummins QSL Tier 4 Final engine
- Variable displacement piston type main pumps with total horsepower control
- Main hoists powered through piston motors and winch planetary drums grooved for 7/8" (22mm) wire rope
- 22,380 lb (10 151 kg) of line pull
- 537 fpm (163.7 m/min) of winch speed
- Three working gauges
- Multiple counterweight configurations

Option external
rated capacity
limiter light bar



Optional - external

20° tilting cab

Roof wiper with
opening top hatch

Optional
Amber strobe

360° remote
high intensity
flood light

Greaseless boom

Optional front and rear tool boxes

Carbody jacks deploy fast and easily

Standard with:

- Upper guardrail
- Rear view camera
- Winch camera
- Hoist drum cable follower
- Travel and swing alarm
- Cat walks
- Assembly RCL capacity chart on jacks





Excellent access with back lit lighting for all routine engine and hydraulic maintenance



Winch view camera

Optional third wrap indicator & function kick-out

Rear view camera

Upper guard rails

6-piece (including carbody) cast modular counterweight


Remote oil cooler

Left/right side catwalks

Lockable compartments

36" (914 mm) 3 bar grousers


Sealed oil-filled idlers upper and lower rollers

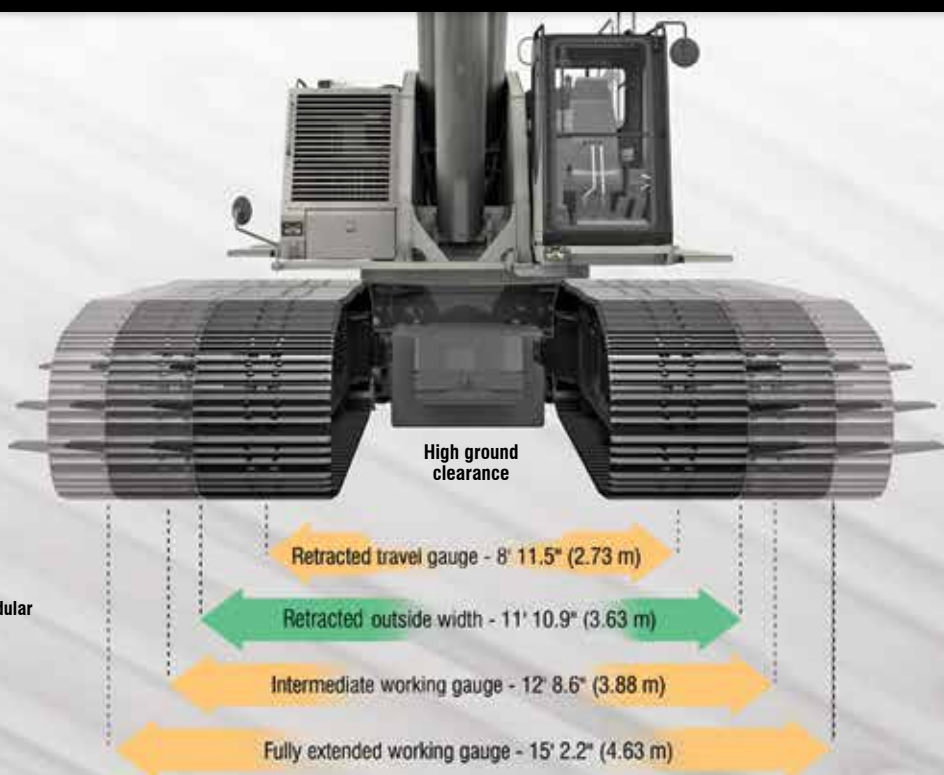

Non-slip safety strips, extended length catwalks, sideframe steps and upper guard rails provide sure-footed access to the crane upper.



Link-Belt has the only greaseless, high-capacity formed booms designed and built in North America!

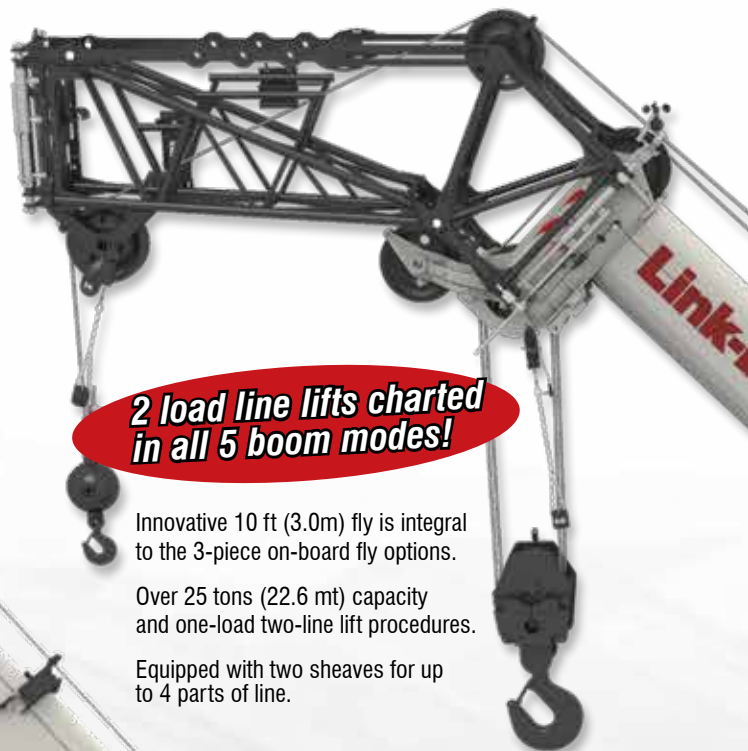

2 load line lifts charted in all 5 boom modes!


Innovative 10 ft (3.0m) fly is integral to the 3-piece on-board fly options.

Over 25 tons (22.6 mt) capacity and one-load two-line lift procedures.

Equipped with two sheaves for up to 4 parts of line.

Pin & latch boom with attachment flexibility

- Ingenious **Teflon wear pucks** impregnated in the full contact wear pads eliminate the need for greasing the boom.
- **Quick reeve boom head** eliminates the need to remove the becket to change the reeving.
- **5 extend modes:** EM1-EM5 and standard modes enhance both the structural and stability capacity capability and are fully synchronized for normal operation.
- **Manual offset fly:** 0°, 15°, 30°, 45°
- **No deducts** for stowed attachments

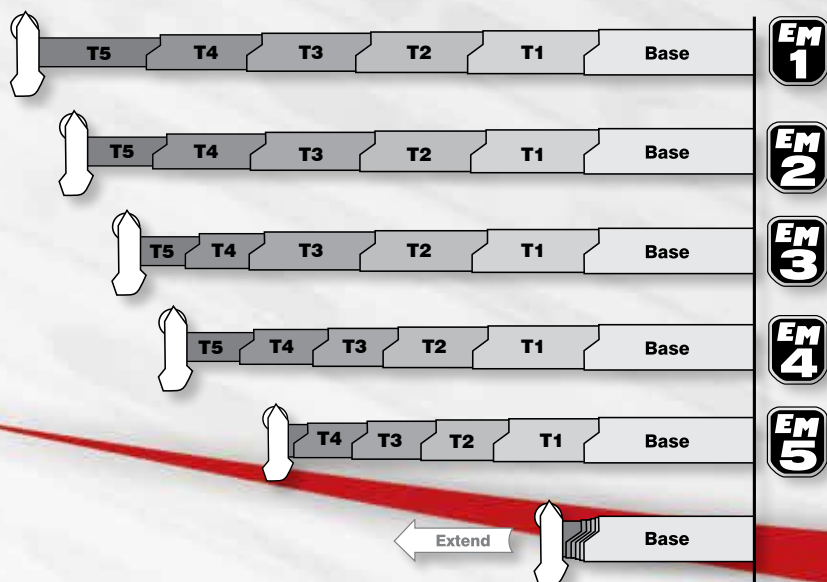

Only 5 Extend Modes!

Link-Belt


GREASELESS BOOM

TEFLON WEAR PADS!



Operator aid features

- Operator settable alarms with function kick-out include left and right **slew angle**, maximum & minimum **boom angle**, head height, **load radius**, **boom length**, and operator defined area

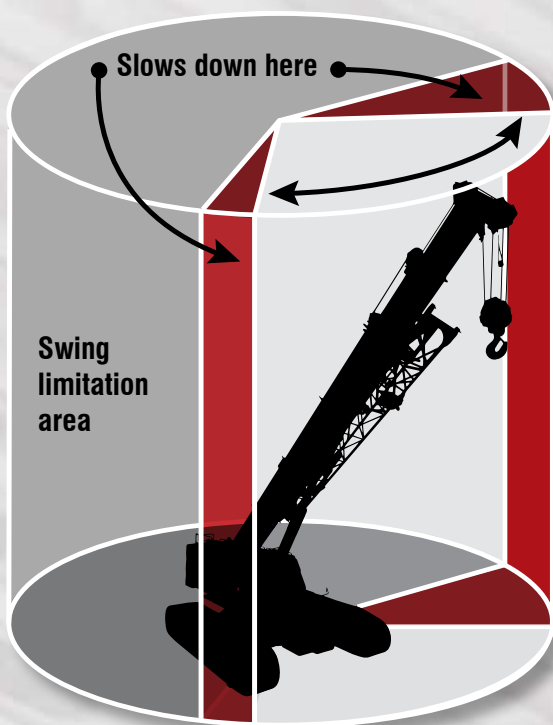


Rope keeper maintains travel of rope through sheave

Quick reeve boom head eliminates the need to remove the becket when it becomes necessary to change the reeving



New efficient fly pinning design focuses on ease of assembly/disassembly

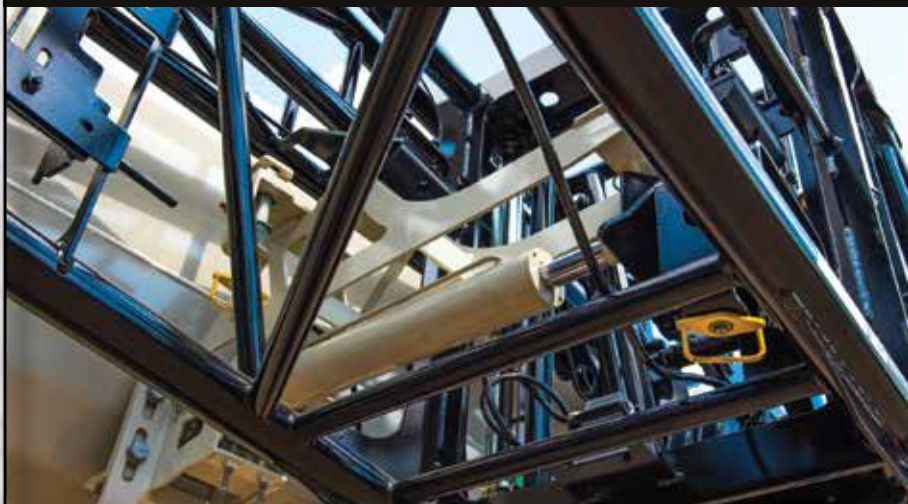

Fly erection and stowing assist cylinder



Highly functional and comfortable cab

- **Cab** tilt to 20°
- High capacity **air-conditioning**
- High capacity **hot water heating**
- **Six-way adjustable seat**
- **LED service monitor screen** provides engine performance and critical data using conventional gauge appearance. Second level provides actual digital values, as well as diagnostic information.
- Adjustable armrest console with **pilot-operated single-axis or joystick controls**
- **Hydraulic pilot controls** for variable hoist, swing and travel performance
- Fingertip **high speed hoist button** for front and rear drum
- **Rear view and winch view cameras**

Link-Belt Pulse is the Link-Belt designed total crane operating system. It includes the rated capacity limiter, ground-bearing pressure monitoring system, boom extend mode controller (EMC), self-diagnostic capabilities and continuous monitoring of multiple crane functions and conditions. To aid operators in a safe and efficient operation, its high-resolution, color-intense graphic display provides excellent contrast even in direct sunlight.

Link-Belt


PULSE




Cellular-based data logging and monitoring system that provides:

- Viewing options for sharing data with distributor and Link-Belt
 - Location and operational settings
 - Monitor routine maintenance intervals
 - Crane and engine monitoring
 - Diagnostic and fault codes
- Powered by**
Link-Belt
PULS

Powered by
Link-Belt
PULSE

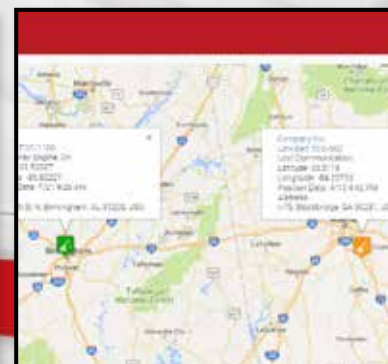[illegible]

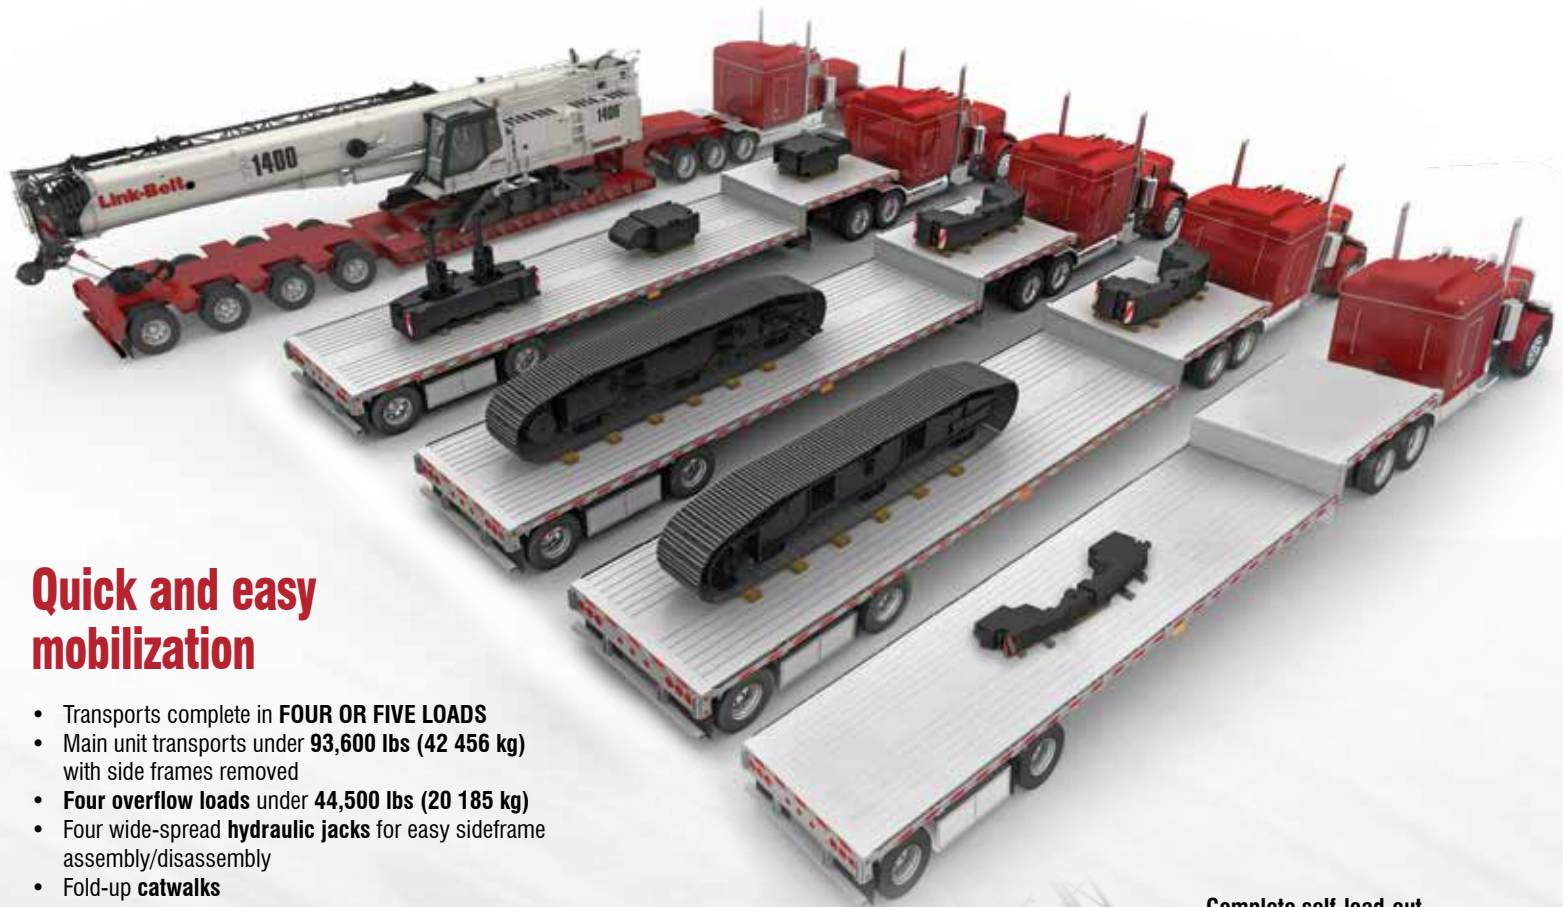

Quick and easy mobilization

- Transports complete in **FOUR OR FIVE LOADS**
- Main unit transports under **93,600 lbs (42 456 kg)** with side frames removed
- **Four overflow loads** under **44,500 lbs (20 185 kg)**
- Four wide-spread **hydraulic jacks** for easy sideframe assembly/disassembly
- Fold-up **catwalks**

JUST 5 TRUCKS GETS THE TCC-1400 TO YOUR JOB!

Main transport load: Under 93,600 lbs (42 456 kg)	12' 8" overall transport height on 10" blocks 10' 6" overall width with sideframes removed
1st overflow: 44,000 lbs (19 958.4 kg)	"A" ctwt 19,000 lbs (8 618.4 kg) Two 12,500 lbs (5 670 kg) carbody counterweights
2nd & 3rd overflow: 44,500 lbs each (20 185.2 kg)	28,500 lbs (12 927.6 kg) sideframe 16,000 upper "B/C" ctwt
Fourth overflow: 6,000 lbs each (2721kg)	6,000 (2721) "D" Counterweight

Complete self-load-out and assembly. Link-Belt PULSE RCL monitors capacities on jacks.



Fast, easy counterweight removal





Link-Belt Construction Equipment Company is a leader in the design, manufacture and sales of telescopic and lattice boom cranes with headquarters and manufacturing facilities in Lexington, Kentucky, USA. Link-Belt is committed to the manufacture and service of high quality products that satisfy customers worldwide

Towards that end, Link-Belt has pursued a strategy of growth and investment. It has moved aggressively to seize more global market share by producing a broader range of products and strengthening distribution and personnel around the globe.

Link-Belt is also home to a family of passionate professionals with a legacy of innovation and cutting-edge technology spanning over 140 years. These professionals, in a 740,000 sq. ft. (68 748 m2) manufacturing facility and with a culture of continuous innovation, have pushed Link-Belt to be the most modern crane manufacturer in North America.

Your crane investment is always protected... with your Link-Belt distributor.

When you invest in a Link-Belt crane, you invest in a legacy of outstanding customer support dating back to 1874.

The ultimate value of a machine begins with state-of-the-art design and quality manufacturing, but it is the excellent Link-Belt distributor product support that determines its long term value.

This philosophy has earned Link-Belt cranes the enviable position of traditionally commanding some of the highest resale prices in the industry.

"... to be
recognized
as a

**leader in
customer
service &
satisfaction."**

— The Link-Belt Vision

Link-Belt® *Preferred*

As a member of Link-Belt Cranes user's group, you will have access to:

- A comprehensive online library of all parts, service and operator manuals for YOUR crane
- Interactive, live groundbearing calculations for YOUR crane
- Plus a vast array of information on new products, services and special offerings
- Online access to recommended spare parts lists, filter, lube and key lists plus maintenance information and more
- No annual fee or charges to access your crane information

**Link-Belt
was born
because our
founding father
understood the
importance of
replacement parts.**

William Dana Everett

Building on that principal...

- Trained technical specialists
- Faster and more efficient customer service
- State of the art computer information systems
- 24 hours a day, 7 days a week
- 72,000 Sq. Ft. Parts Distribution Center
- All parts in stock ship the same business day

**Link-Belt
CRANES
GENUINE
PARTS**



©Link-Belt is a registered trademark. Copyright 2017
All rights reserved. We reserve the right to change
designs and specifications at any time. Litho in U.S.A.
10/17 1640 #4519

Link-Belt
CRANES
Lexington, Kentucky | www.linkbelt.com